TRUE EUROPE

Field's End Road, Goldthorpe, Nr. Rotherham, South Yorkshire S63 9EU, England • www.truemfg.com • Tel 01709 888 080 • FAX 01709 880 838 • Free Phone 0 800 783 2049 • Free Phone to U.S. 0 800 894 928

Project Name: _		AIA #
Location:		
Item #:	Qty:	SIS #
Model #:		

Model: TGW-2

Gastronorm Worktop: *Solid Door Refrigerator*



TGW-2

- True's worktop's are designed with enduring quality and value that protects your long term investment.
- Designed using the highest quality materials and components to provide the user with colder product temperatures, lower utility costs, exceptional food safety and the best value in today's food service marketplace.
- Oversized, environmentally friendly (134A) force-air refrigeration system holds .5°C to 3.3°C (33°F to 38°F).
- 300 series stainless steel exterior.
- Radius countertop. Cabinet top and backsplash - one piece formed construction.
- ▶ 300 series stainless steel interior.
- LED temperature display.
- Front breathing.
- Foamed-in-place, high density polyurethane insulation (CFC free).
- 3 sets of 1/1 gastronorm rails with stainless steel shelves per section.

Reverse Condensing Fan Motor Reverse Gondensing Fan Motor Reversing Air Flow Keeps Your Condenser Clean!* * Manufacturer recommended condenser cleaning every 2-3 months. Please consult your technical/installation manual for proper cleaning instructions.




ROUGH-IN DATA

Specifications subject to change without notice. Chart dimensions rounded up to the next whole millimeter (inches rounded up to the next ½").

		Capacity (liters)		Cabinet Dimensions (mm) (inches)					NEMA	Cord Length (total m)	Crated Weight (kg)	
Model	Doors	(Cu. Ft.)	Shelves	L	D†	H*	HP	Voltage	Amps	Config.	(total ft.)	(lbs.)
TGW-2	2	297	6	1420	712	839	1/3	230-240/50/1	2.3	A	2.74	N/A
		10.46		55 ⁷ /8	28	33					9	

- † Depth does not include 26 mm (1") for bumpers.
- * Height does not include 127 mm (5") for castors.

▲ Plug type varies by country.



TGW-2

Gastronorm Worktop:

Solid Door Refrigerator



STANDARD FEATURES

DESIGN

 True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, lower utility costs, exceptional food safety and the best value in today's food service marketplace.

REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly (CFC free) 134A refrigerant.
- Oversized, factory balanced refrigeration system with guided airflow to provide uniform product temperature.
- Extra large evaporator coil balanced with higher horsepower compressor and large condenser; maintains cabinet temperatures of .5°C to 3.3°C (33°F to 38°F) for the best in food preservation.
- Sealed, cast iron, self-lubricating evaporator fan motors and larger fan blades give True worktop units a more efficient low velocity, high volume airflow design. This unique design insures faster temperature recovery and shorter run times in the busiest of food service environments.

CABINET CONSTRUCTION

- Exterior 300 series stainless steel.
- Interior 300 series stainless steel.
- Countertop heavy 16 gauge stainless radius front. Cabinet top and backsplash - one piece formed construction. Bacteria and food particles can not be trapped underneath as with other two-piece worktop units.
- Insulation entire cabinet structure and solid doors are foamed-inplace using high density, CFC free, polyurethane insulation.
- 102 mm (4") diameter stem castors locks provided on front set. 866 mm (341/16") work surface height.

DOORS

- Stainless steel.
- Positive seal self-closing doors with 90° stay open feature. Doors swing within cabinet dimensions.
- Each door fitted with 305 mm (12") long recessed handle that is foamedin-place with a sheet metal interlock to insure permanent attachment.
- Magnetic door gaskets of one piece construction, removable without tools for ease of cleaning.

SHELVING

- Three (3) sets of 1/1 gastronorm rails per section.
- Three (3) stainless steel shelves 324 mm L x 534 mm D (12³/4" x 21") per section.

MODEL FEATURES


- Evaporator is epoxy coated to eliminate the potential of corrosion.
- Self-contained condensate pan. No need for external drain.

ELECTRICAL

- Unit completely pre-wired at factory and ready for final connection to a 230-240/50/1 phase dedicated outlet. Cord and plug set included.
- Plug type varies by country.

OPTIONAL FEATURES/ACCESSORIES

- \square 64 mm (2¹/₂") diameter castors.
- ☐ 153 mm (6") standard legs (requires leg mounting plates).
- ☐ 153 mm (6") seismic/flanged legs (requires leg mounting plates).

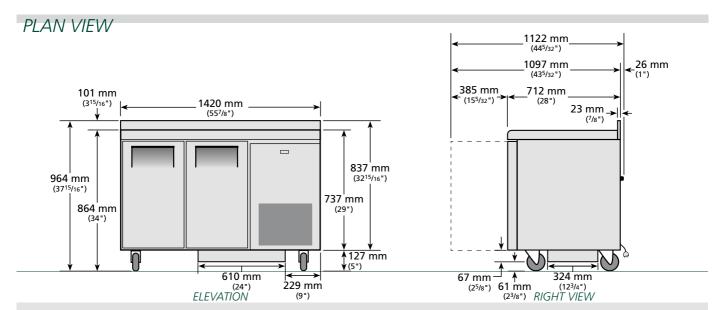

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

KCL	Model	Elevation	Right	Plan	3D
	TGW-2				