


SpidoCook™



Glassceramic contact grills

Flat plate black version

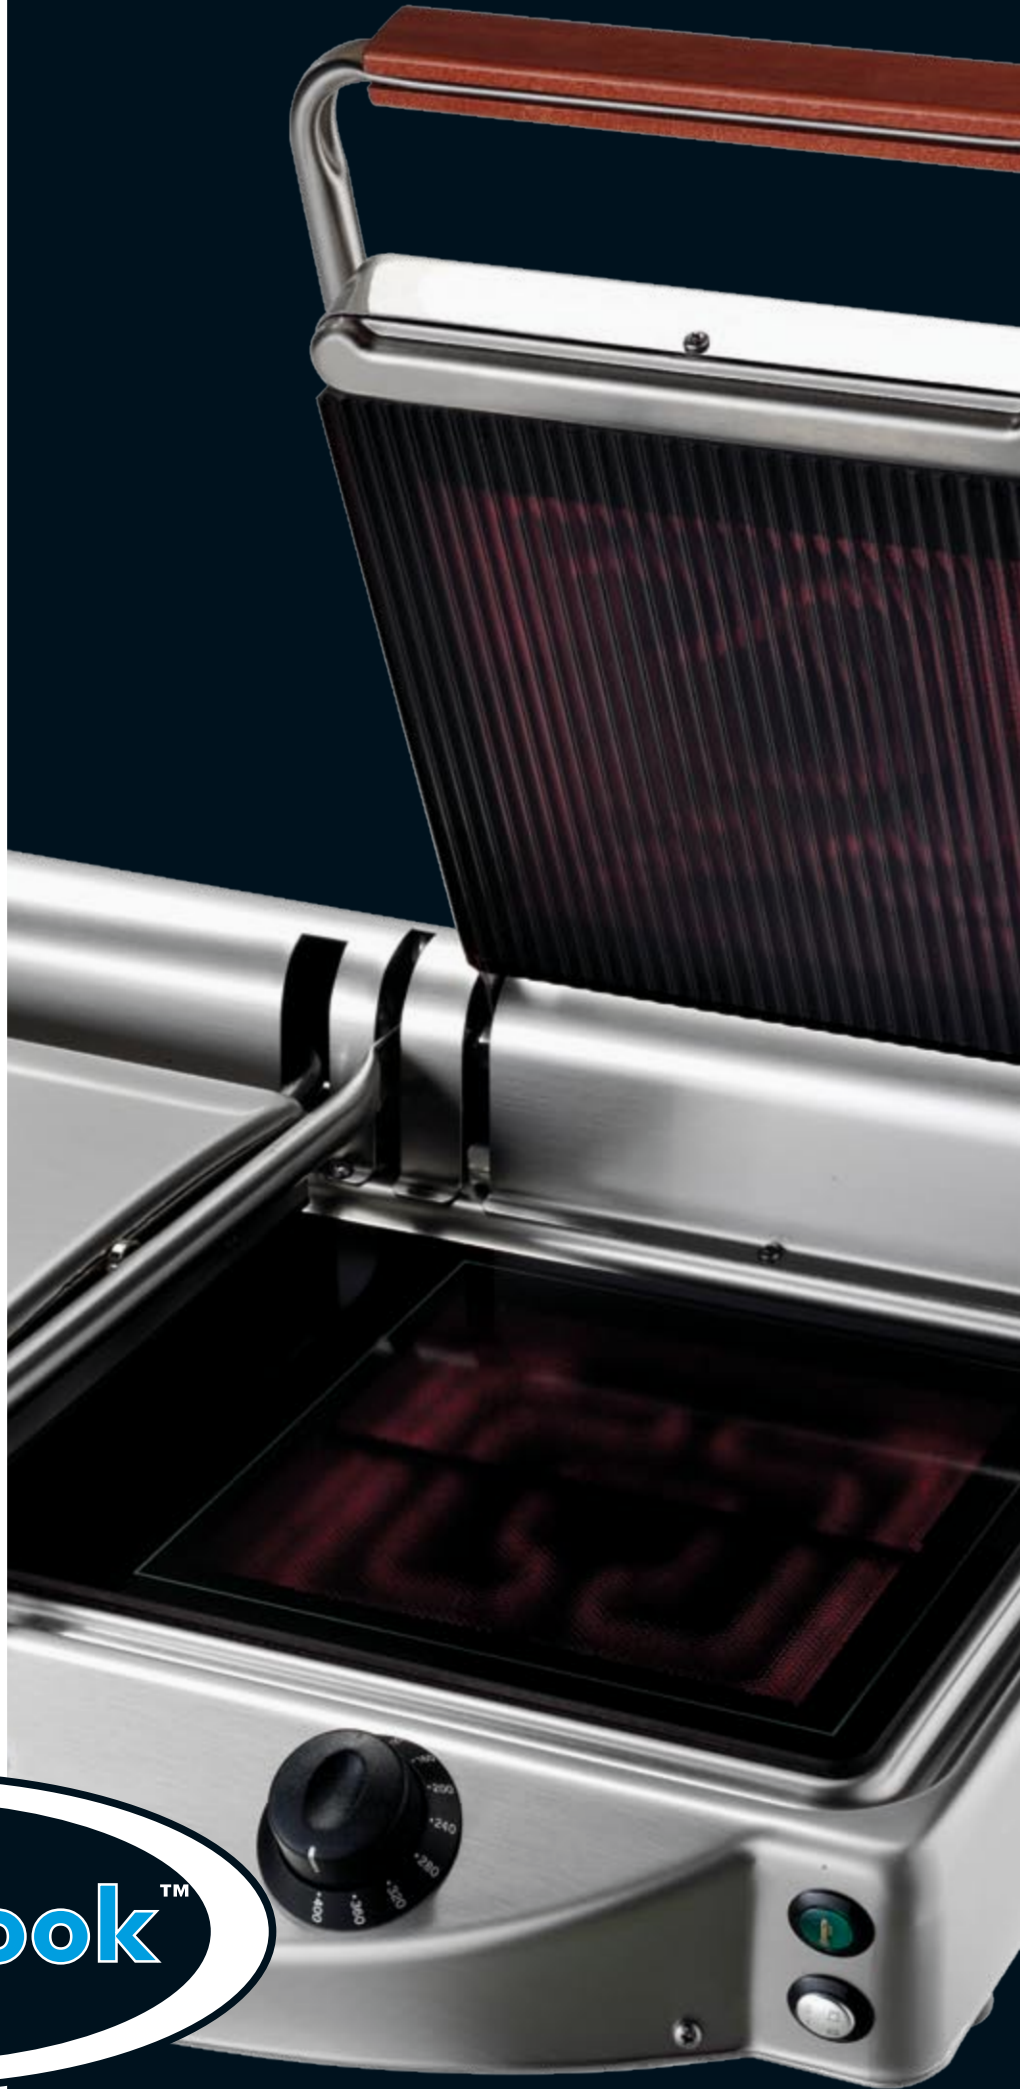

XP 010 P




XP 020
XP 020 P

	XP 010 P	XP 020	XP 020 P
Plate dimensions	N° 1 250x250 mm	N° 2 250x250 mm	N° 2 250x250 mm
Voltage	230 V~ 1N	230 V~ 1N	230 V~ 1N
Frequency	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz
Electrical power	1,5 kW	2 kW	3 kW
Max. temperature	400 °C	400 °C	400 °C
Dimensions	331x458x176 WxDxH mm	619x458x176 WxDxH mm	619x458x176 WxDxH mm
Weight	10 Kg	17 Kg	17 Kg

Ribbed top plate black version



XP 010 PR



XP 020 R
XP 020 PR

	XP 010 PR	XP 020 R	XP 020 PR
Plate dimensions	N° 1 250x250 mm	N° 2 250x250 mm	N° 2 250x250 mm
Voltage	230 V~ 1N	230 V~ 1N	230 V~ 1N
Frequency	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz
Electrical power	1,5 kW	2 kW	3 kW
Max. temperature	400 °C	400 °C	400 °C
Dimensions	331x458x176 WxDxH mm	619x458x176 WxDxH mm	619x458x176 WxDxH mm
Weight	10 Kg	17 Kg	17 Kg

Flat transparent plate version



XP 010 PT



XP 020 T
XP 020 PT

	XP 010 PT	XP 020 T	XP 020 PT
Plate dimensions	N° 1 250x250 mm	N° 2 250x250 mm	N° 2 250x250 mm
Voltage	230 V~ 1N	230 V~ 1N	230 V~ 1N
Frequency	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz
Electrical power	1,5 kW	2 kW	3 kW
Max. temperature	400 °C	400 °C	400 °C
Dimensions	331x458x176 WxDxH mm	619x458x176 WxDxH mm	619x458x176 WxDxH mm
Weight	10 Kg	17 Kg	17 Kg

Glassceramic fry tops



XP 200



XP 300

	XP 200	XP 300
Plate dimensions	N° 1 280x440 mm	N° 2 285x440 mm
Voltage	230 V~ 1N	230 V~ 1N / 400 V~ 3N
Frequency	50 / 60 Hz	50 / 60 Hz
Electrical power	2,5 Kw	5 Kw
Max. temperature	400 °C	400 °C
Dimensions	398x610x127 WxDxH mm	690x610x127 WxDxH mm
Weight	10 Kg	15 Kg